


TACFLEX LIQUID TIGHT LSF FLEXIBLE CONDUITS



**tacflex**

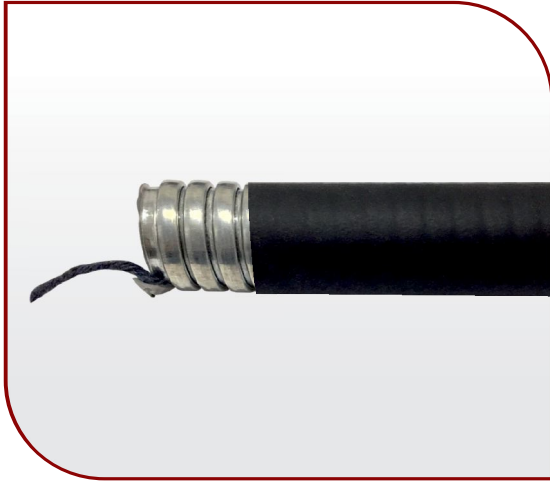


**FLEXIBLE SPIRAL CONDUITS  
LIQUID TIGHT HALOGEN FREE**

**TECHNICAL DETAILS**

Material : Galvanised steel TPV coated liquid tight  
 Certificates : ROHS, CE, PT, TUV, Halojen Free  
 Color : Black  
 Other color versions are available on request with reasonable qty.  
 Protection class : IP66  
 Temperature range : -20 °C +100 °C

**Properties**  
 High impact strength  
 Self-extinguishing  
 High UV resistance (black)  
 Halogen free  
 Low fire hazard



**HALOGEN FREE AĞIR HİZMET TPV KAPLI METAL SİRİAL BORULAR**

Hammaddesi : Galvaniz & kalay kaplı sac  
 Kaplama : TPV  
 Sürekli ısıya direnci : -20 °C +100 °C  
 Özellik : Alev iletmez  
 UV dayanımlı  
 Halogen free  
 Ağır hizmet tipi  
 Kırılmayı önleyici mühür ipli  
 Renk : Gri / Siyah

PRODUCT RANGE OVERVIEW

Code	Size	d mm.		d1 mm.		Roll Length mt.
LGTHF 10	1/4"	10,3	10,5	15,5	16	30
LGTHF 12	3/8"	12,3	12,7	17,5	18	30
LGTHF 16	1/2"	15,5	16,3	20,8	21,4	30
LGTHF 21	3/4"	20,9	21,3	26,2	26,5	30
LGTHF 27	1"	26	27	32,7	33,3	30
LGTHF 35	1 1/4"	35	35,5	41,5	42	15
LGTHF 40	1 1/2"	40	40,5	47,3	48,2	15
LGTHF 51	2"	51,5	51,9	59,5	60	15
LGTHF 63	2 1/2"	63	63,5	72,2	73	7,5
LGTHF 78	3"	78	78,5	88	88,5	7,5
LGTHF 91	3 1/2"	88,9	89,9	100,6	101,6	7,5
LGTHF 102	4"	101,6	102,6	113,3	114,3	7,5