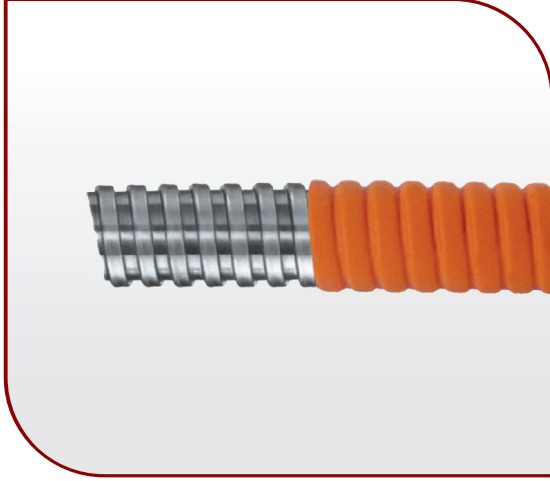


TACFLEX TPV COATED METAL FLEXIBLE CONDUITS


FLEXIBLE SPIRAL CONDUITS TPV COATED

TECHNICAL DETAILS

Material	: Galvanised steel TPV coated
Certificates	: ROHS, CE, PT, TUV, Halojen Free
Protection class	: IP54, IP65
Temperature range	: -20 °C +100 °C

Properties

High impact strength
Halogen free
Low fire hazard
Self-extinguishing
High UV resistance (black)
Full-shrink packing



HALOGEN FREE KAPLI METAL SİRİAL BORULAR

Hammaddesi	: Galvaniz & kalay kaplı sac
Renk	: Turuncu / siyah
Kaplama	: TPV
Sürekli ısıya direnci	: -20 °C + 100 °C
Özellik	: Halogen free Alev iletmez UV dayanımlı

PRODUCT RANGE OVERVIEW

Code	Size	d mm.	d1 mm.	Roll Length mt.
OPCHF 7	-	7,5	11,5	50
OPCHF 9	1/4"	9	13	50
OPCHF 11	3/8"	11	115	50
OPCHF 13	3/8"	13	16,5	50
OPCHF 14	-	14	18	50
OPCHF 16	1/2"	16	20	50
OPCHF 18	-	18	22	50
OPCHF 21	3/4"	21	25	50
OPCHF 26	1"	26	31	25
OPCHF 29	-	29	34	25
OPCHF 32	-	32	37	25
OPCHF 35	1 1/4"	35	40	25
OPCHF 37	-	37	42	25
OPCHF 40	1 1/2"	40	45	25
OPCHF 42	-	42	47	25
OPCHF 45	-	45	50	25
OPCHF 51	2"	51	56	25
OPCHF 63	2 1/2"	63	68	25
OPCHF 75	3"	75	83	25

Halogen free