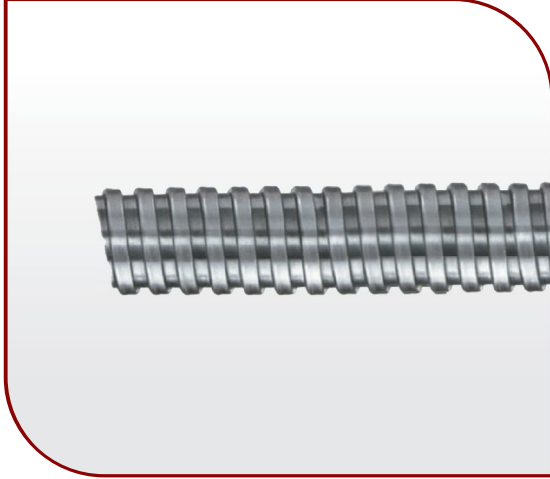


TACFLEX METAL FLEXIBLE CONDUITS


FLEXIBLE SPIRAL CONDUITS METAL

TECHNICAL DETAILS

Material : Galvanised steel
 Certificates : ROHS, CE, PT, TUV
 Protection class : IP40
 Temperature range : -100 °C + 300 °C

Properties

High impact strength
 High abrasion resistance
 Halogen free
 Low fire hazard
 Self-extinguishing
 Full-shrink packing



METAL SİRİAL BORULAR

Hammaddesi : Galvaniz & kalay kaplı sac
 Sürekli ısıya direnci : -100 °C + 300 °C

PRODUCT RANGE OVERVIEW

Code	Size	d mm.	d1 mm.	Roll Length mt.
OCGS 7	-	7,5	10,5	50
OCGS 9	1/4"	9	12	50
OCGS 11	3/8"	11	14	50
OCGS 13	3/8"	13	16	50
OCGS 14	-	14	17	50
OCGS 16	1/2"	16	19	50
OCGS 18	-	18	21	50
OCGS 21	3/4"	21	24	50
OCGS 26	1"	26	30	25
OCGS 29	-	29	33	25
OCGS 32	-	32	36	25
OCGS 35	1 1/4"	35	39	25
OCGS 37	-	37	41	25
OCGS 40	1 1/2"	40	44	25
OCGS 42	-	42	46	25
OCGS 45	-	45	49	25
OCGS 51	2"	51	55	25
OCGS 63	2 1/2"	63	67	25
OCGS 75	3"	75	80	25