


ORTAC VENTILATION ELEMENTS >>>>>>



ORvent

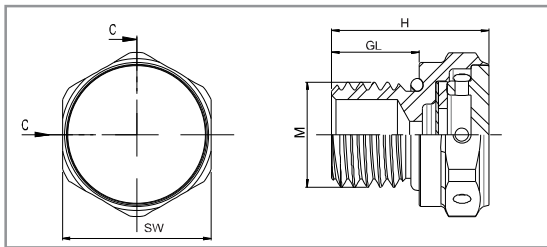

VENTILATION PLUGS STAINLESS STEEL

TECHNICAL DETAILS

Material	
Cap & body	: Stainless Steel (ASISI 303/316L)
O-ring	: NBR / EPDM
Vent Part	: Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)
Connection thread	: Metric (EN 60423)
Certificates	: ROHS,CE,PT,TUV
Protection class	: IP68
Temperature range	: -20 °C +100 °C -30 +150 °C (short term)


Benefits

- Balance the pressure inside and outside of your systems
- Prevents corrosion and water condensation inside the enclosure
- Extend the lifetime of your product
- Various air flows
- Easy to assemble
- High chemical resistance

Applications

- Industrial and electronic applications
- Wind & Solar applications
- Lighting Industry, Food & Beverage Industry
- Automotive & Automation technology
- Railway industry

VENTILATION PLUGS

PRODUCT RANGE OVERVIEW	AG Thread	Code	H mm	GL mm		Thread Diameter mm	Hole Diameter mm	Average Air Flow l/H	Water Intrusion mbar
	M 4 x 0,70	OMSVP4S	11	3	12	4	4,2	6	0,1
	M 4 x 0,70	OMSVP4M	11	3	12	4	4,2	9	0,1
	M 4 x 0,70	OMSVP4H	11	3	12	4	4,2	45	0,1
	M 4 x 0,70	OMSVP4UH	11	3	12	4	4,2	105	0,1
	M 8 x 1,25	OMSVP8S	14	6	12	8	8,2	6	0,1
	M 8 x 1,25	OMSVP8M	14	6	12	8	8,2	9	0,1
	M 8 x 1,25	OMSVP8H	14	6	12	8	8,2	45	0,1
	M 8 x 1,25	OMSVP8UH	14	6	12	8	8,2	105	0,1
	M 10 x 1,5	OMSVP10S	14	6	12	10	10,2	6	0,1
M 10 x 1,5	OMSVP10M	14	6	12	10	10,2	9	0,1	
M 10 x 1,5	OMSVP10H	14	6	12	10	10,2	45	0,1	
M 10 x 1,5	OMSVP10UH	14	6	12	10	10,2	105	0,1	
M 12 x 1,5	OMSVP01S	14	6	17	12	12,3	16	0,8	
M 12 x 1,5	OMSVP01M	14	6	17	12	12,3	25	0,5	
M 12 x 1,5	OMSVP01H	14	6	17	12	12,3	150	0,2	
M 12 x 1,5	OMSVP01UH	14	6	17	12	12,3	300	0,1	
M 12 x 1,5	OMSVP01SL	18	10	17	12	12,3	16	0,8	
M 12 x 1,5	OMSVP01ML	18	10	17	12	12,3	25	0,5	
M 12 x 1,5	OMSVP01HL	18	10	17	12	12,3	150	0,2	
M 12 x 1,5	OMSVP01UHL	18	10	17	12	12,3	300	0,1	