TACFLEX FLEXIBLE CONDUITS - Steel wire over braiding

tacflex

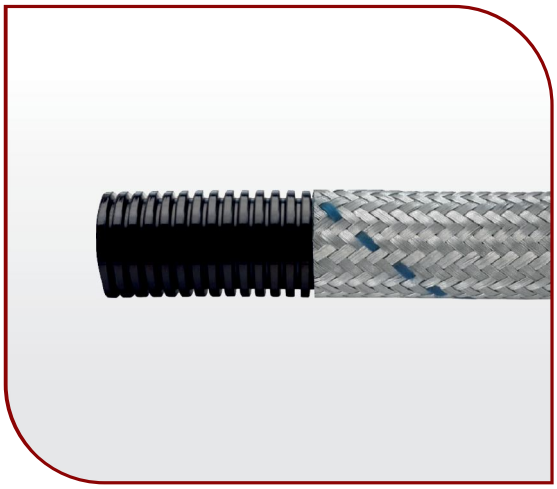

FLEXIBLE SPIRAL CONDUITS
STEEL WIRE OVER BRAIDING POLYAMIDE CONDUIT

TECHNICAL DETAILS

Material : Galvanised steel wire overbraiding polyamide conduits
Certificates : ROHS, CE, PT, TUV,Halojen Free
* stainless steel overbraiding version is available on request

Protection class : IP65
Temperature range : -40 °C +120 °C

Properties
High impact strength
High abrasion resistance
Apply with either LSPR-LSRDP fixed or swivel body type conduit fittings
Full-shrink packing
Halogen free
Self-extinguishing



ÇELİK TEL ÖRGÜLÜ POLYAMİD SPİRAL BORULAR

Hammaddesi : Polyamide PA6 V2
1. kaplama : Galvaniz çelik
Spiral rengi : Gri - Siyah
Sürekli ısıya direnci : -40 °C + 120 °C

PRODUCT RANGE OVERVIEW

Code	d mm.	d1 mm.	Roll Length mt.
CTPAS 7	6,5	12	100
CTPAS 8,5	8,5	14	100
CTPAS 9	10	15	100
CTPAS 11	12	17,8	50
CTPAS 13,5	14,2	20,4	50
CTPAS 16	16,5	23,2	50
CTPAS 21	23	30,4	50
CTPAS 29	29	36,5	25
CTPAS 36	36	44,5	25
CTPAS 48	48	56,5	25