


TACFLEX PVC COATED METAL FLEXIBLE CONDUITS



tacflex

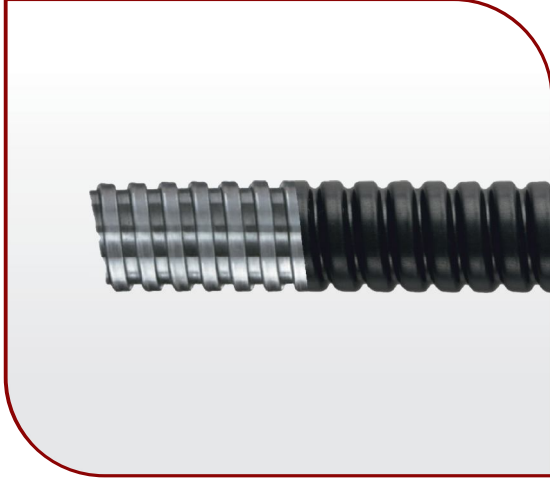


**FLEXIBLE SPIRAL CONDUITS
PVC COATED METAL**

TECHNICAL DETAILS

Material : Galvanised steel PVC coated
 Certificates : ROHS, CE, PT, TÜV, TSE
 Color : Black (RAL9005)
 Other color versions are available on request with reasonable qty.
 Protection class : IP54, IP65
 Temperature range : -15 °C +70 °C

Properties
 High fatigue life
 High impact strength
 Self-extinguishing
 High UV resistance (black)
 Full-shrink packing



PVC KAPLI METAL SİRAL BORULAR

Hammaddesi : Galvaniz & kalay kaplı sac
 Renk : Gri / Siyah
 Kaplama : PVC
 Sürekli ısıya direnci : -15 °C + 70 °C
 Özellik : Alev iletmez
 UV dayanımlı

PRODUCT RANGE OVERVIEW

Code	Size	d mm.	d1 mm.	Roll Length mt.
OPCGS 7	-	7,5	11,5	50
OPCGS 9	1/4"	9	13	50
OPCGS 11	3/8"	11	15	50
OPCGS 13	3/8"	13	17	50
OPCGS 14	-	14	18	50
OPCGS 16	1/2"	16	20	50
OPCGS 18	-	18	22	50
OPCGS 21	3/4"	21	25	50
OPCGS 26	1"	26	31	25
OPCGS 29	-	29	34	25
OPCGS 32	-	32	37	25
OPCGS 35	1 1/4"	35	40	25
OPCGS 37	-	37	42	25
OPCGS 40	1 1/2"	40	45	25
OPCGS 42	-	42	47	25
OPCGS 45	-	45	50	25
OPCGS 51	2"	51	56	25
OPCGS 63	2 1/2"	63	68	25
OPCGS 75	3"	75	83	25